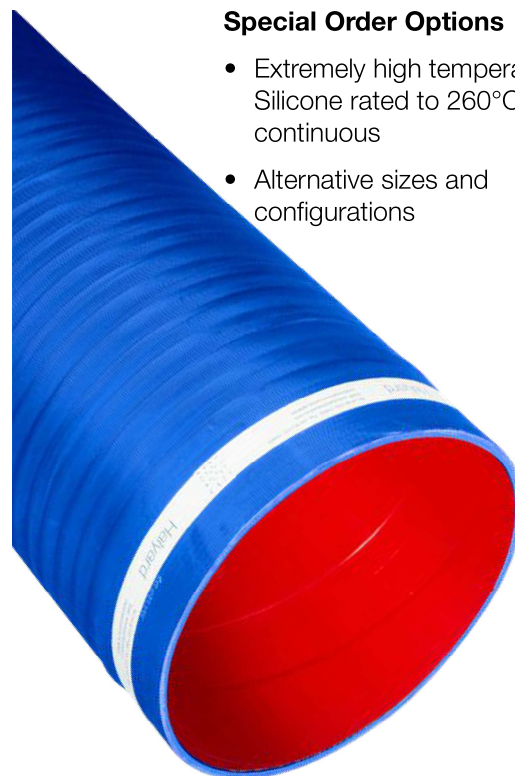


Wire Reinforced Silicone Exhaust Hose				
Temperature rating - Continuous: 180°C, intermittent: Contact Halyard				
Part No.	Reference	I.D.		Max. Length
		inch	mm	metres
H022181	SW38	1.50	38	11
H022182	SW41	1.61	41	6
H022183	SW44	1.73	44	12
H022184	SW51	2.01	51	12
H022185	SW60	2.36	60	12
H022186	SW63	2.48	63	6
H022187	SW76	2.99	76	12
H022188	SW89	3.50	89	12
H022189	SW102	4.02	102	12
H022190	SW113	4.45	113	11
H022191	SW127	5.00	127	12
H022192	SW152	5.98	152	12
H022193	SW177	6.97	177	6
H022194	SW203	7.99	203	6
H022195	SW254	10.00	254	6
H022196	SW305	12.01	305	6
H022197	SW356	14.02	356	4.5
H022198	SW406	15.98	406	3.5
H022199	SW456	17.95	456	2
Available as wired to end or with soft cuffed ends to aid hose clamping				

**Special Order Options**

- Extremely high temperature Silicone rated to 260°C continuous
- Alternative sizes and configurations

Silicone Flexible Bellows					
Temperature rating - Continuous: 180°C, intermittent: Contact Halyard					
Part No.	Reference	I.D.		Length Overall	Single/Dual Hump
		inch	mm	mm	
H003300	CB1063	2.5	63	150	Single
H003301	CB1076	3.0	76	170	Single
H003302	CB1090	3.5	89	220	Single
H003303	CB1102	4.0	102	220	Single
H003304	CB1127	5.0	127	220	Single
H003305	CB1152	6.0	152	220	Single
H003306	CB1178	7.0	178	220	Single
H003307	CB1203	8.0	203	220	Single
H003308	CB1254	10.0	254	250	Single
H003309	CB1305	12.0	305	300	Single
H003310	CB2102	4.0	102	350	Double
H003311	CB2152	6.0	152	350	Double
H003312	CB2178	7.0	178	350	Double
H003313	CB2203	8.0	203	350	Double
H003314	CB2254	10.0	254	350	Double
H003315	CB2305	12.0	305	350	Double
H003316	CB2324	12.76	324	350	Double
H003317	CB2355	14.02	356	400	Double

Special Order Options

- Extremely high temperature Silicone rated to 260°C continuous
- Alternative sizes and configurations

